



North American
Safety Valve
Industries, Inc.



35,000 Safety & Relief Valves
Ready to Ship

When the pressure is on, trust North American Safety Valve Industries

We're Always on Standby

When you're under pressure, NASVI's ready to help.



New & Remanufactured Safety Valves

Extensive stock of new valves from trusted, top manufacturers and dependable remanufactured valves back by a 2-year warranty.



Same or Next-Day Shipping

Avoid or minimize downtime with NASVI's same or next-day shipping.



State-of-the-Art Repair & Setting Centers

Nearly every safety valve's specifications are at our technicians' fingertips for exact work. Generally, irreparable valves can be replaced from our in-stock inventory.



Turnaround Exchange Program

Receive the valves needed for installation prior to shutting down, then ship us the old valves for repair or exchange.

Get an Instant Quote

nasvi.com/quote

1600 Warren St.
North Kansas City, MO 64116

Phone: (800) 800-8882

Phone: (816) 421-7042

Fax: (816) 421-0297

sales@nasvi.com

spec sheet



KUNKLE MODEL 140 LIQUID RELIEF VALVE

SAFETY AND RELIEF PRODUCTS

Stainless steel liquid relief valve with a side outlet suitable for a variety of applications up to 300 psig (20.7 barg)



FEATURES

- Compact design requires minimum installation space.
- Angle lapped seat provides tight shutoff.
- Tested and inspected for pressure setting and leakage.
- Female NPT inlet option available.
- 50 psig (3.45 barg) maximum back pressure^[1].

NOTE

1. Back pressure increases set pressure on a one to one basis, and reduces capacity. Back pressure in excess of 10% of set pressure is not recommended.

GENERAL APPLICATION

Model 140 is a general utility valve of all stainless steel construction, including spring, for non-code liquid applications.

TECHNICAL DATA

Connections:	Threaded NPT
Temperature range:	-60° to 406°F (-51° to 208°C)
Pressure range:	10 to 300 psig (.69 to 20.7 barg)

KUNKLE MODEL 140 LIQUID RELIEF VALVE

SAFETY AND RELIEF PRODUCTS


PARTS AND MATERIALS

No.	Part name	Material
1	Nozzle	SS A582-303
2	O-ring	PTFE
3	Disc	SS A743-CF8
4	Bonnet	SS A743-CF8
5	Spring	SS A313-302
6	Gasket	PTFE
7	Compression screw	SS A479-304
8	Cap	SS A479-304

SPECIFICATIONS

Size	Inlet	Outlet	Dimensions (in)			Weight (oz)
			A	B	C	
	3/8" or 1/2"	1/2"	2 1/4	1 1/16	4	14

Dimensions are for reference only

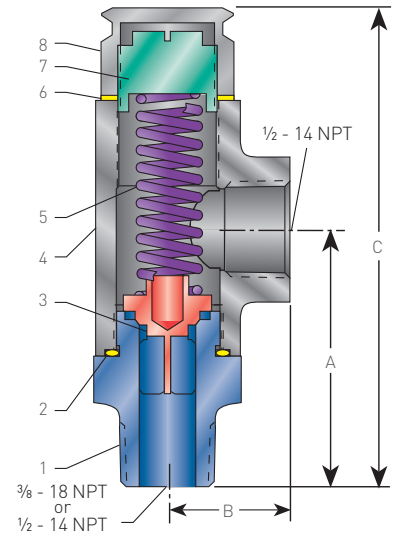

SELECTION GUIDE

Example:	0140	-	B	01	-	M	E	0100
Model	0140							
Inlet size								
B	3/8"							
C	1/2"							
Variation								
01	Catalog standard							
02	FNPT x FNPT							
Design revision								
	Indicates non-interchangeable revision							
	Dash (-) if original design							
Service								
M	Non-code liquid							
Spring material								
E	302 SS							
Set pressure								
0010	10 psig							
0300	300 psig							

CAPACITIES FOR NON-CODE LIQUID - 25% ACCUMULATION (GPM)

Set pressure psig	Capacity GPM
10	0.9
20	1.5
30	2.1
40	2.8
50	3.4
60	4.1
70	4.8
80	5.5
90	6.2
100	6.9
110	7.6
120	8.3
130	9.0
140	9.6
150	10.2
160	10.8
170	11.3
180	11.8
190	12.3
200	12.8
210	13.2
220	13.5
230	13.8
240	14.1
250	14.3
260	14.5
270	14.6
280	14.6
290	14.6
300	14.5

