



**North American  
Safety Valve  
Industries, Inc.**



**35,000** Safety & Relief Valves  
Ready to Ship

When the pressure is on, trust North American Safety Valve Industries

## We're Always on Standby

When you're under pressure, NASVI's ready to help.



### **New & Remanufactured Safety Valves**

Extensive stock of new valves from trusted, top manufacturers and dependable remanufactured valves back by a 2-year warranty.



### **Same or Next-Day Shipping**

Avoid or minimize downtime with NASVI's same or next-day shipping.



### **State-of-the-Art Repair & Setting Centers**

Nearly every safety valve's specifications are at our technicians' fingertips for exact work. Generally, irreparable valves can be replaced from our in-stock inventory.



### **Turnaround Exchange Program**

Receive the valves needed for installation prior to shutting down, then ship us the old valves for repair or exchange.

## **Get an Instant Quote**

[nasvi.com/quote](http://nasvi.com/quote)

1600 Warren St.  
North Kansas City, MO 64116

Phone: (800) 800-8882

Phone: (816) 421-7042

Fax: (816) 421-0297

[sales@nasvi.com](mailto:sales@nasvi.com)

spec sheet



## KUNKLE MODEL 299 DRIP PAN ELBOW

SAFETY AND RELIEF PRODUCTS

Provides a means to handle condensate from safety valves used in steam applications



### FEATURES

- Model 0299-H: used for safety valve outlet size of 2" (DN 50).
- Model 0299-J: used for safety valve outlet size of 2½" (DN 65).
- Model 0299-K: used for safety valve outlet size of 3" (DN 80).
- Model 0299-M: used for safety valve outlet size of 4" (DN 100).
- Model 0299-P: used for safety valve outlet size of 6" (DN 150).
- Model 0299-Q: used for safety valve outlet size of 8" (DN 200).

### GENERAL APPLICATION

Recommended installation on outlet/discharge pipe for safety valves used on steam service.


### TECHNICAL DATA

Material: Cast iron  
Sizes: 2" to 8"  
Connections: 2" to 4" NPT  
6" and 8" (DN 150 and DN 200) integrally flanged

# KUNKLE MODEL 299 DRIP PAN ELBOW

## SAFETY AND RELIEF PRODUCTS

### Installation guide

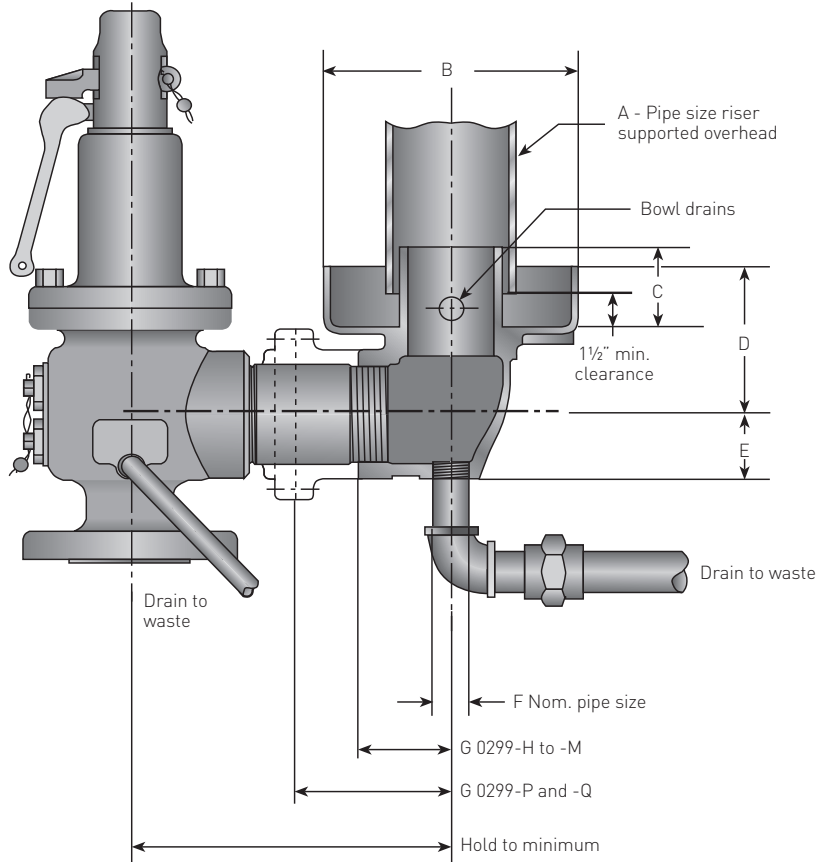

### Model 299 drip pan elbow

The illustration shows a discharge elbow and drip pan unit attached to a safety valve with female NPT outlet. For safety valves with flanged outlets - 2" to 4" - use companion flange, short nipple and drip pan elbow, all same size as valve outlet. 6" and 8" elbows have integral 125# ANSI B16.1 flange.

### NOTE

Important - length of discharge piping must be kept to a minimum. For design considerations see articles: 'Steam flow through safety valve vent pipes' by H.E. Brandmaier and M.E. Knebel (Dec. 1975) and 'Analysis of power plant safety and relief valve vent stacks' by G.S. Liao (Nov. 1974) available through ASME publications.

### DIMENSIONS - inches

Model	Size <sup>1)</sup>	Dimensions, in							Weight (lb)
		A	B	C	D	E	F	G	
0299-H	2"	3	6 1/4	2 3/8	3 3/8	1 5/8	1/2 NPT	2 1/4	7 1/2
0299-J	2 1/2"	3 1/2 / 4	7 3/8	3	4 5/16	1 15/16	3/4 NPT	2 11/16	14
0299-K	3"	4	8	3 1/2	4 7/8	2 5/16	3/4 NPT	3 1/8	19
0299-M	4"	6	9 5/8	4 1/2	5 3/4	2 7/8	3/4 NPT	3 3/4	36
0299-P	6"	8	12 3/4	6 5/8	7 7/16	4 3/16	3/4 NPT	8	98
0299-Q	8"	10	16 1/2	7 1/2	9 7/16	5 3/8	1 NPT	10 3/4	180

### NOTE

Dimensions are for reference only.

1. Safety valve outlet and drip pan elbow size.



